

# ProGlide UltraFlat



High Performance Wheelchair  
Accessible Sliding Door

FLOOR TO CEILING DESIGNS  
FOR MODERN LIVING.

1300 ALSPEC (257732)  
alspec.com.au

**alspec**  
ALUMINIUM SYSTEMS  
SPECIALISTS

# Alspec's Wheelchair Accessible Sliding Door


The ProGlide UltraFlat™ Sliding Door from Alspec allows architects and designers the freedom to achieve large expansive openings whilst also offering a weather resistant wheelchair compliant sill to AS1428.1 without the need to compromise on performance or aesthetics.

Specifying Alspec's ProGlide UltraFlat™ ensures the client receives a solid, durable high performance product offering a continuous accessible path of seamless transition between internal and external floor finishes.


Designed and manufactured in Australia to meet the extremes of the Australian environment, the Alspec ProGlide UltraFlat™ is the first choice amongst architects, builders, home owners and fabricators when performance and quality matter.

## Typical Configurations


### Double Track



### Triple Track

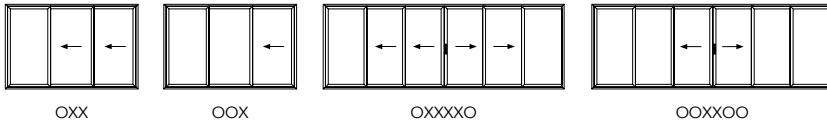

## CAD Cross Sections

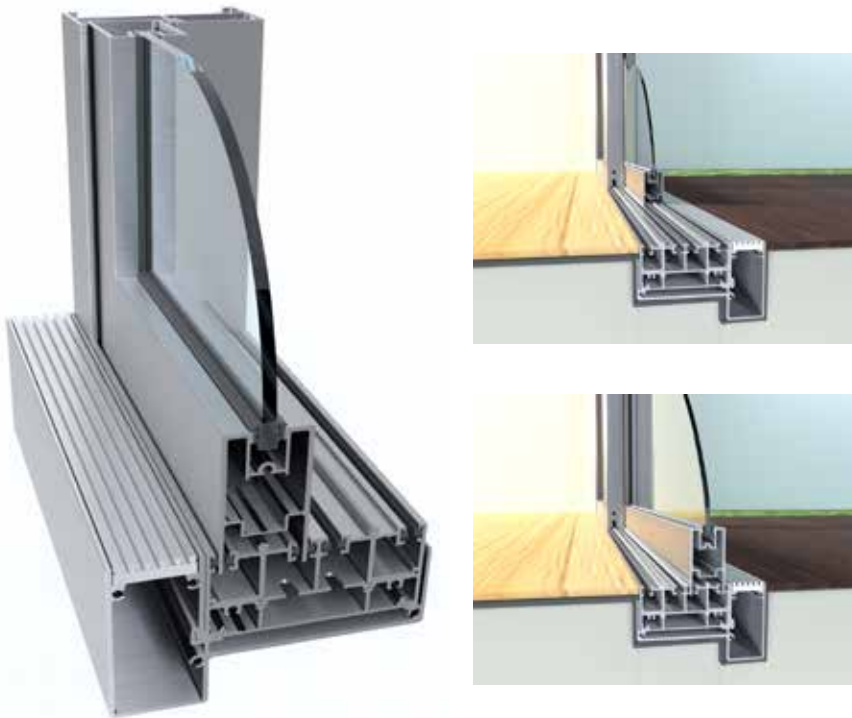

## Key Features

- AS1428.1 wheelchair compliant sill ideal for aged care living applications.
- 250Pa water resistant sill.
- Large sliding panels, ideal for housing, apartment and commercial applications.
- Inside, outside sliding panels, allowing multiple panel designs.
- Allows up to 4 panels stacking in each direction.
- Heavy duty aluminium profiles.
- Accepts up to 14mm single glazed and up to 28mm double glazing units, allowing the designer to achieve the most demanding thermal and acoustic specifications.
- 90 degree post free corner option.

## Technical Specifications

Frame Dimensions	
Option 1	101 x 50mm
Option 2	151.5 x 50mm
Maximum Product Performance	
SLS (Pa)	1000
ULS (Pa)	2400
WATER (Pa)	250
Maximum Recommended Sizes	
Height	3000mm
Sash Width	1800mm
Weight	200kg per sash
Acoustic Performance	
Glass Type	Rw (C; C <sub>tr</sub> )
6.38mm Laminate	32 (0, -2) dB
10.38/12/6.38 IGU	38 (-2, -4) dB
Thermal Performance	
Uw range SG	4.3 - 6.1
SHGC range SG	0.38 - 0.66
Uw range DG	3.0 - 3.9
SHGC range DG	0.22 - 0.55
Glazing Details	
Single Glazed	5 - 13.52mm
Double Glazed	18 - 28mm
Compatible Systems	
McArthur Evo Centre Pocket Framing	
ecoFRAMEplus	
Hunter Evo	

