

# View-Max

Sliding Window



# View-Max

Double Hung Window

**MAXIMUM VIEW,  
UNLIMITED POSSIBILITIES.**

1300 ALSPEC (257732)  
[alspec.com.au](http://alspec.com.au)


**alspec**  
ALUMINIUM SYSTEMS  
SPECIALISTS

## Maximum View - Unlimited Possibilities

The View-Max window offers unparalleled levels of flexibility by allowing designers, architects, the choice of 76mm (Derwent) or 101.6mm (McArthur) framing to cater for both the slimline applications and those of a more robust commercial design.

The View-Max window offers the flexibility of single and double glazing options. The View-Max integrates a number of design initiatives unique to Alspec such as the proprietary locking, roller and drainage systems.

## Typical Configurations

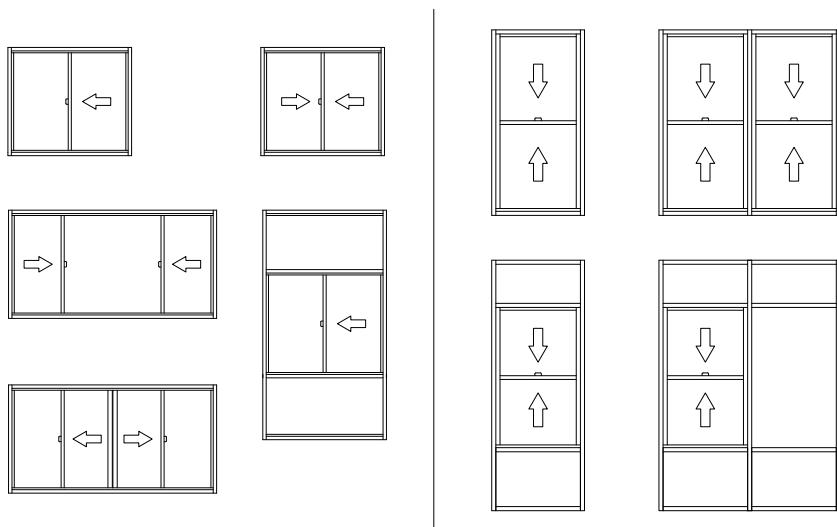

## CAD Cross Sections

ViewMax Sliding Window



ViewMax Double Hung



## Key Features

- Commercially designed with sliding & double-hung options to suit 76mm and 101.6mm
- Developed specifically for multi-storey residential and architecturally designed housing
- 4mm up to 11mm monolithic glass and up to 16mm double glazed units.
- Superior thermal and acoustic performance (refer to test reports)
- Superior weather performance
- No tooling required, minimal processing, cost effective and simple fabrication

## Technical Specifications

Frame Dimensions (both)		
Option 1	76 x 35mm	
Option 2	101.6 x 44.5mm	
Maximum Recommended Sizes	ViewMax Sliding	ViewMax Double Hung
Height	1600mm	1190mm
Width	1200mm	1200mm
Weight	50kg	20kg
Maximum Product Performance	ViewMax Sliding	ViewMax Double Hung
SLS (Pa)	2000	2200
ULS (Pa)	6000	4100
Water (Pa)	600	350
Acoustic Performance	ViewMax Sliding	ViewMax Double Hung
Glass Type	R <sub>w</sub> (C; C <sub>tr</sub> ) dB	R <sub>w</sub> (C; C <sub>tr</sub> ) dB
6.38mm Laminate	31 (-0,-2)	32 (-1,-2)
10.38mm/ 12/ 6.38mm IGU	34 (-1,-3) (10.38mm lam)	N/A
Thermal Performance	ViewMax Sliding	ViewMax Double Hung
U <sub>w</sub> range SG	4.7 - 6.6	4.3 - 6.6
SHGC range SG	0.28 - 0.69	0.27 - 0.66
U <sub>w</sub> range DG	3.2 - 4.4	3.4 - 4.5
SHGC range DG	0.16 - 0.6	0.19 - 0.58
Glazing Details (both)		
Single Glazed	4 - 10.38mm	
Double Glazed	16 - 18mm	
Compatible Systems (both)		
Derwent		
McArthur Evo Centre Pocket Framing		
ecoFRAMEplus		

